



Series 10 Volumetric Filler

When filling volumetrically, the fill weight is determined by the number of auger revolutions, controlled by a PLC via integral shaft encoder. In free-standing semi-automatic form, it offers a versatile and low-cost filling solution.

Standard Features

- ▼ Free-standing
- ▼ Semi-automatic
- ▼ All stainless-steel contact parts
- ▼ 56 litre stainless steel hopper
- ▼ No-tools removable change parts
- ▼ Auger machined from solid
- ▼ Servo-driven auger
- ▼ Independent agitation drive
- ▼ PLC control via touch-screen panel

Options

- ▼ Product Recipe Memory
- ▼ Lean-Clean 56 Litre Split Hopper
- ▼ Hopper Level Probe
- ▼ Bulk Feed Accessories
- ▼ Fill Weight Feedback from External Checkweigher
- ▼ Full stainless-steel specification
- ▼ 316L contact parts
- ▼ Bottom-up lift system
- ▼ Worktable
- ▼ 38 litre hopper



All-Fill International Ltd

Unit 5 Gateshead Close | Sandy | Bedfordshire | SG19 1RS | United Kingdom

+44(0)1767 691100

info@allfill.co.uk


www.allfill.co.uk

Series 10 Volumetric Filler



Standard Specification

Controller type:	Siemens PLC	Auger revs:	0.0003 rev incremental adjustment
HMI:	Colour touch-screen panel	Auger tooling:	Manufactured from solid steel
Hopper capacity:	56 litres	Contact parts:	304 grade stainless steel
Agitation drive:	0.55kW	Fill weight range:	1g – 50kg
Agitation options:	Continuous	Power:	2.2 kva
	With fill only	Typical Weight:	175kg
	With fill and time delay		
	No agitation		

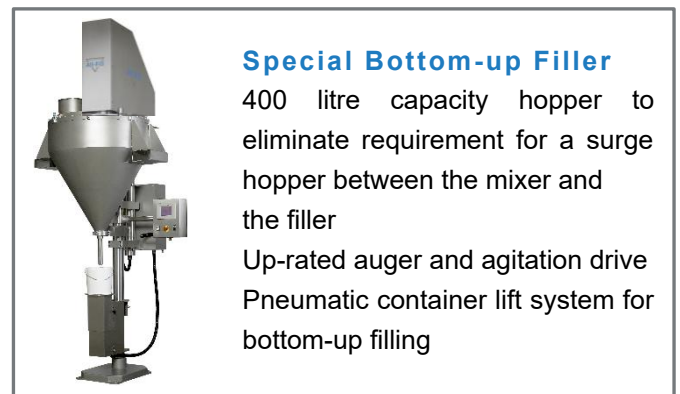

All-Fill International Ltd

Unit 5 Gateshead Close | Sunderland Road | Sandy | Bedfordshire | SG19 1RS | United Kingdom

+44(0)1767 691100

info@allfill.co.uk

www.allfill.co.uk